


**Item 2 (Ref. NS1017X1538\*)**

Type N - Single phase cast resin control, isolating and safety transformer

**Technical Characteristics**

Rating	1600VA
Input voltage	220-380-415-440V
Output voltage	48V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	AN
Ambient temperature	30°C
Temperature rise	Class B
Insulation	Class B - 130°C
Windings	Class HC - 220°C
Test voltage	4,6 kV (1 min, 50 Hz) pri-sec 3,2 kV (1 min, 50 Hz) pri-earth 2,5 kV (1 min, 50 Hz) sec-earth
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws

Representative picture of the product

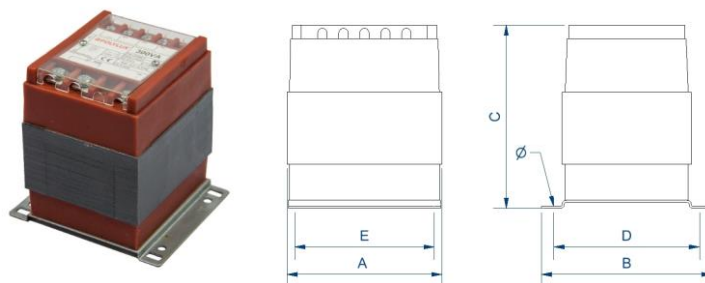

Item	Reference*	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	ø (mm)	Weight (kg)
2	NS1017X1538	150	165	210	145	125	7Ø	16,9 kg

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.  
 Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured.

\* This reference may not be stated in the manufactured product (it is used only for identification purposes)

Do not hesitate to contact us for any additional information required